

快特勵食品機械有限公司 源 輾 機 械 廠 有 限 公 司

Quickly Food Machinery Co., Ltd. Yuan Jaan Machinery Factory Co., Ltd.

Email: yuchfood@ms47.hinet.net Website: http://www.yuanjaan.com

工廠總公司

32083 桃園市中壢區普忠路349號 No. 349, Puzhong Rd., Zhongli Dist., Taoyuan City 32083, Taiwan Tel: +886-3-435-1087 Fax: +886-3-435-4517

高雄展示廳

81272 高雄市小港區中安路480號

Skype 帳號:yuanjaan



www.yuanjaan.com



超節能!省時、省工、省瓦斯!

Super Super-Energy Saving! Time Saving, Labor Saving, Gas Saving!



蒸食 ● Steaming Food

發酵 ● Fermentation

保温 ● Thermal Insulation

























榮獲世界多國專利及台灣多項新型專利 專利在案,仿冒必究

Our products have the honor to obtain many global patents affirmation. Copyright protected.

Violators will be prosecuted.



快特勵食品機械有限公司源 輾 機 械 廠 有 限 公 司

Quickly Food Machinery Co., Ltd. Yuan Jaan Machinery Factory Co., Ltd.

66 超節能!省時、省工、省瓦斯!

Super Super-Energy Saving!

Time Saving, Labor Saving, Gas Saving!





關於我們 \\

本公司成立於1985年,為專業商用不鏽鋼蒸櫃及保溫箱製造及出口廠商。秉持著30餘年的專業經驗,我們提供客戶CE品質認證、設計新穎及獨家專利之產品,使客戶生產出外型美觀、口味獨特之產品,進而提升市場競爭力,達到主顧雙贏目的。

為了提供客戶更完善的服務,本公司自2008年起,擴增產品線並提供相關食品生產Know-How,及相關整廠生產設備提供及諮詢。

產品介紹 \

專利設計,英國國家CE認證,品質優越,功能最齊全。特製大把手,特大型後鈕,蒸氣不外洩,可定時、定溫、蒸食、發酵、殺菌之用。外箱與內箱中間保溫壁10公分厚,保溫效果佳,外箱不發熱。設有自動加水箱,水位太低或太高會自動警示及水位透視玻璃裝置,不會有加水麻煩,特設煮水器,使其加熱特快,水常溫3分鐘即可煮沸,從常溫至90℃氣化只需6分多鐘。

特設有滅音器及蒸氣減壓閥,蒸氣量特大,熱度提高,使其熱度分佈平均,絕無死角,使蒸物上下均匀, 絕不滴水,使蒸物保持最佳狀態。內壁設有傳統式,古早味、木板、竹片、葉片構造,能保持蒸櫃內部 最佳濕度,及產生古早味的香醇,使蒸物表皮不會乾皮。

瓦斯比一般傳統式節省,節約能源又省錢,蒸煮時間比一般傳統式快。蒸櫃門採用耐高溫安全玻璃,蒸煮過程中能清楚看到蒸物過程,透明度極佳,容量特大,蒸物層層排列不浪費空間,提高您省時、省工、省瓦斯。高效率又賺錢之利器,不鏽鋼製成,美觀耐用,容易清潔。

不是鍋爐,絕無危險。專業製造,品質保證,深受海內外使用者好評,提供不同尺寸訂製, 給顧客最滿意的需求。歡迎內外銷合作。

適用範圍 \\

舉凡蒸籠、蒸箱能蒸的產品,本產品皆可取代之。傳統式蒸籠、蒸箱蒸出來不美的產品,我們幫您完成,如:米飯類、穀類、餐點類、糕點類、粿類、魚肉類、素食…等食品,解決高筋麵粉包子、饅頭蒸出時會縮及皺紋的難題,能使麵皮較白、較亮、較大,口感更佳。

About Us \\

Yuan Jaan Machinery Factory Co., Ltd. (Quickly Food Machinery Co., Ltd.) was established in 1985. We are a professional manufacturer and exporter of commercial stainless steel kitchen equipment of steamer and warmer! With more than 30 years professional experience in this field we afford CE approval, innovative designed and unique patented products to help

our customers be competive in the market and gain a good reputation for using our machine to cook the foods with good looking and delious taste. Since 2008 we extend our product line to meet our customer need and afford production know-how as well as turnkey service.

Introduction ****

A patent-protected, validate by England CE mark, high quality, innovative steamer with multifunction equipped with enlarged handles and reinforced hinges for trouble free daily operations and causing no steam leakage, being instruments and switches controlled, the steaming time and temperature can be preset activate and alarm signals, in addition, this steamer is excellent for leavening, steam cooking and disinfections. There is a 10 cm thermo-insulation layer between the casings and inner wall. That's highly efficiency to keep warm inside and no heat outside the casing. Furthermore, the unit is with an auto water-feeding tank that eliminates the chore adding water. Water too low or too high, there will be an alarm. The auto water-feeding tank is equipped with glass view to enable you to inspect the water level. Beside, the evaporator equipped in the unit expedites the heating dramatically-it takes only 3 minutes to reach boiling phase and only 6 minutes to heat water from room temp to 90°C.

This unit is equipped with a silencer/muffler and an adjustable humidity control. The steaming chamber with a secondary steaming structure can generate maximum volume of steam, heating up rapidly without dripping the steam sprayed out flow upwards spiral thus the steam is evenly

distributed in the chamber without any blind corners to assure the food is keeping at the best steaming condition. The inner wall is design as the traditional type-made by wood, bamboo and bamboo-leaf style construction-keeping the inner at the best moisture condition that can making foods have the traditional flavor and no dry-surface on the food.

Compared to a conventional one, this steamer is an amazing gas-saver, thus it is energy and cost saving. The time of boiling will be shorter than the conventional one. The steamer door is made of high temperature resistant clear glass, therefore the entire course of steaming is visualized anytime. Extra large spaces created by the stainless steel multi-shelves save your space, labor, cost and high efficiency that work as your moneymaker. It is attractive in appearance, easy to clean and gives extended service life.

This is a real steamer rather than a boiler and it is built by our experts' tremendous experience, thus quality assured. Tailor-made steamers are available upon request to meet your maximum satisfaction. We are welcome to cooperate with any domestic and abroad sale agents.

**Applied Products **

Our steamer cabinet can replace all the traditional bamboo steamers for steaming the food. Such as rice, grains, meals, dumpings, siopao, rice cake, fish, meat, vegetarian food... etc. The abnormal shape problem of foods caused by traditional steamers can be solved by ours. It's specialized

in solving the surface corrugation and contraction problem of high gluten Chinese bun and made it bigger, more glossy and more delicious than the traditional steamers do.

01

蒸箱。蒸櫃系列

Steamers Series

節能設計,省時、省工、省瓦斯,可兼當發酵用! Super Super-Energy Saving! Time Saving, Labor Saving, Gas Saving!



* 瓦斯型 Gas Type



KS-60(2)

- 三面保温壁式。
- 3-insulation Wall Type.
- * 瓦斯型 Gas Type



KS-60E(1)

- EGO旋鈕式。
- EGO Switch Type.
- * 電熱型 Electrothermal Type





- 温控式。
- Temperature Control.
- * 電熱型 Electrothermal Type







- 前排煙到頂式。
- Chimney to Top Type.
- * 瓦斯型 Gas Type



KS-60(4)

- 自動點火,可溫控。
- Auto-ignite and Temperature Control.





KS-60D >>>

- 抽屜式。
- Drawer Type.
- * 瓦斯型 Gas Type







規格 \ Specification

型 號 Model	機械尺寸 (寬×深×高) Machine Dimension (L×w×H)	蒸盤數量 No. of Plate	蒸盤尺寸 Size of Plate	電 壓 Voltage
KS-60(1)	765 × 693 × 1330 mm	8 pcs	465 × 465 mm	
KS-60(2)	765 × 750 × 1500 mm	7 pcs	465 × 465 mm	
KS-60(3)	765 × 770 × 1330 mm	8 pcs	465 × 465 mm	
KS-60(4)	765 × 693 × 1500 mm	7 pcs	465 × 465 mm	110V/220V (控制箱電壓 / Voltage of Control Panel)

規 格 \ Specification

型 號 Model	機械尺寸 (寬×深×高) Machine Dimension (L×W×H)	蒸盤數量 No. of Plate	蒸盤尺寸 Size of Plate	電 壓 Voltage
KS-60E(1)	765 × 655 × 1500 mm	8 pcs	465 × 465 mm	3Ø, 220V/380V/415V, 9~12 KW (電熱型電壓 / Voltage of Electrical Steamer)
KS-60E(2)	765 × 655 × 1500 mm	8 pcs	465 × 465 mm	3Ø, 220V/380V/415V, 9~12 KW (電熱型電壓 / Voltage of Electrical Steamer)
KS-60D	728 × 715 × 1458 mm	6 pcs	465 × 465 mm	

型類。型量系列

Steamers Series

節能設計,省時、省工、省瓦斯,可兼當發酵用! Super Super-Energy Saving! Time Saving, Labor Saving, Gas Saving!

KS-80 >>>

- 鍋爐專用蒸櫃。
- Boiler Applied Cabinet.







KS-580 / KS-590

- 存放及展示式蒸箱。
- ◉ 三面玻璃。
- Storage and Display Type.
- 3-glass Wall Type.
- * 瓦斯型 Gas Type







KS-70

- 雙台車鍋爐專用蒸櫃。
- Twin Trolleys Type Boiler Applied Cabinet.





KS-980 / KS-960

* 瓦斯型 Gas Type









規格 W Specification

型 號 Model	機械尺寸 (寬×深×高) Machine Dimension (L×w×H)	蒸盤數量 No. of Plate	蒸盤尺寸 Size of Plate	電 壓 Voltage
KS-80	1225 × 1000 × 2100 mm	15 pcs	605 × 605 mm	110V/220V (控制箱電壓 / Voltage of Control Panel)
KS-70	1225 × 1690 × 2100 mm	30 pcs	605 × 605 mm	110V/220V (控制箱電壓 / Voltage of Control Panel)

規 格 **** Specification

型 號 Model	機械尺寸 (寬×深×高) Machine Dimension (L×w×H)	蒸盤數量 No. of Plate	蒸盤尺寸 Size of Plate
KS-580 存放式 Storage Type	965 × 876 × 2092 mm	11 pcs	605 × 605 mm
KS-590 子母式 Rack & Trolley Type	1055 × 890 × 2033 mm	12 pcs	605 × 605 mm
KS-980	990 × 896 × 2033 mm	12 pcs	605 × 605 mm
KS-960	840 × 741 × 2033 mm	12 pcs	465 × 465 mm

 $\sqrt{05}$

蒸箱o蒸櫃系列

Steamers Series

節能設計,省時、省工、省瓦斯,可兼當發酵用! Super Super-Energy Saving! Time Saving, Labor Saving, Gas Saving!

KS-610U >>>

- 美規式。
- 自動點火,可溫控。
- 前排煙到頂式。
- American Standard.
- Auto-ignite and Temperature Control.
- Chimney to Top Type.
- * 瓦斯型 Gas Type







KS-610(1)

- 自動點火,可溫控。
- Auto-ignite and Temperature Control.
- * 瓦斯型 Gas Type








規格 W Specification

型 號 Model	機械尺寸 (寬×深×高) Machine Dimension (L×w×H)	蒸盤數量 No. of Plate	蒸盤尺寸 Size of Plate	電 壓 Voltage
KS-610U	1210 × 1066 × 2058 mm	12 pcs	605 × 605 mm	110V/220V (控制箱電壓 / Voltage of Control Panel)
KS-610UB	$1070 \times 926 \times 2058 \mathrm{mm}$	12 pcs	465 × 465 mm	110V/220V (控制箱電壓 / Voltage of Control Panel)
KS-610(1)	1117 × 927 × 2058 mm	12 pcs	605 × 605 mm	110V/220V (控制箱電壓 / Voltage of Control Panel)
KS-610(1)B	977 × 787 × 2058 mm	12 pcs	465 × 465 mm	110V/220V (控制箱電壓 / Voltage of Control Panel)

KS-610(2)

- 前排煙到頂式。
- Chimney to Top Type.
- * 瓦斯型 Gas Type

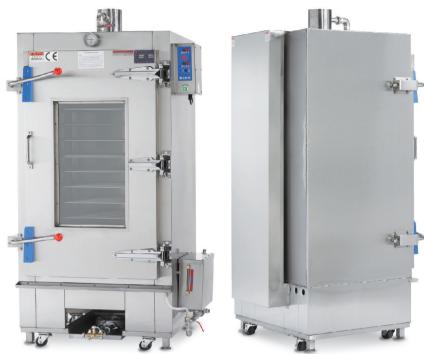





KS-610(3)

- 另有杉木式:保持古早味。
- Optional: Fir Wood Type.
- * 瓦斯型 Gas Type







規格 \ Specification

	발 號 ∕lodel	機械尺寸 (寬×深×高) Machine Dimension (L×w×H)	蒸盤數量 No. of Plate	蒸盤尺寸 Size of Plate	電 壓 Voltage
KS-	610(2)	$1117 \times 1066 \times 2058 \text{ mm}$	12 pcs	605 × 605 mm	110V/220V (控制箱電壓 / Voltage of Control Panel)
KS-	610(2)B	977 × 926 × 2058 mm	12 pcs	465 × 465 mm	110V/220V (控制箱電壓 / Voltage of Control Panel)
KS-	610(3)	1117 × 988 × 2058 mm	12 pcs	605 × 605 mm	110V/220V (控制箱電壓 / Voltage of Control Panel)
KS-	610(3)B	977 × 850 × 2058 mm	12 pcs	465 × 465 mm	110V/220V (控制箱電壓 / Voltage of Control Panel)

07

然简o然應系列

Steamers Series

節能設計,省時、省工、省瓦斯,可兼當發酵用! Super Super-Energy Saving! Time Saving, Labor Saving, Gas Saving!

KS-610A

- ◉ 高温殺菌。
- ◉ 最高温度可達130℃。
- High Temperature Sterilization.
- Max Temperature 130°C.
- * 瓦斯型 Gas Type







KS-610C / KS-610D

- 雙門式。
- Twin Doors Type.
- * 瓦斯型 Gas Type







規格 W Specification

型 號 Model	機械尺寸 (寬×深×高) Machine Dimension (L×W×H)	蒸盤數量 No. of Plate	蒸盤尺寸 Size of Plate	電 壓 Voltage
KS-610A	1117 × 933 × 2183 mm	12 pcs	605 × 605 mm	110V/220V (控制箱電壓 / Voltage of Control Panel)
KS-610C	2025 × 933 × 2058 mm	24 pcs	605 × 605 mm	110V/220V (控制箱電壓 / Voltage of Control Panel)
KS-610D	1745 × 793 × 2058 mm	24 pcs	465 × 465 mm	110V/220V (控制箱電壓 / Voltage of Control Panel)

KS-610E / KS-610EB

* 電熱型 Electrothermal Type



KS-910

- 四層式蒸氣爐台。
- 雙門掀開式。
- Steamer Stove. 4 Layers.
- Twin Cover Doors Type.
- * 瓦斯型 Gas Type









規格 \ Specification

型 號 Model	機械尺寸 (寬×深×高) Machine Dimension (L×w×H)	蒸盤數量 No. of Plate	蒸盤尺寸 Size of Plate	電 壓 Voltage
KS-610E	1117 × 933 × 2058 mm	12 pcs	605 × 605 mm	3Ø, 220V/380V/415V, 12~18 KW (電熱型電壓 / Voltage of Electrical Steamer)
KS-610EB	977 × 793 × 2058 mm	12 pcs	465 × 465 mm	3Ø, 220V/380V/415V, 12~18 KW (電熱型電壓 / Voltage of Electrical Steamer)
KS-910	958 × 890 × 1800 mm	4 pcs	605 × 605 mm	

lacksquare

Bamboo Steamer Application Type & Proofer Fermentation

節能設計,省時、省工、省瓦斯,可兼當發酵用! Super Super-Energy Saving! Time Saving, Labor Saving, Gas Saving!

KS-90(1)

- 小籠包專用機,四孔。
- 合8时竹籠。
- Small Steamed Bun. 4 Holes.
- For 24.24 cm Bamboo Steamer.
- * 電熱型 Electrothermal Type





KS-680

- ◉ 腸粉、小籠包兩用機。
- Dual Purpose Steamer. For steamed rice roll and small steamed bun.
- * 瓦斯型 Gas Type





KS-90(2)

- 小籠包專用機,四孔。
- 合8 时竹籠。
- Small Steamed Bun. 4 Holes.
- For 24.24 cm Bamboo Steamer.
- * 瓦斯型 Gas Type







KS-30

- > 落地式發酵箱。
- Floor Type Fermentation Container (Proofer).
- * 電熱型 Electrothermal Type







KS-50

- 子母式發酵箱。
- Rack and Trolley Type Fermentation Container (Proofer).
- * 電熱型 Electrothermal Type









規格 \ Specification

型 號 Model	機械尺寸 (寬×深×高) Machine Dimension (L×w×H)	出氣口數量 No. of Vent	電 壓 Voltage
KS-90(1)	830 × 725 × 752 mm	4 Holes	3Ø, 220V/380V/415V, 9~24 KW (電熱型電壓 / Voltage of Electrical Stemaer)
KS-90(2)	830 × 825 × 752/852 mm	4 Holes	
KS-680	866 × 840 × 845/995 mm	2 Holes	

規格 \ Specification

型 號 Model	機械尺寸 (寬×深×高) Machine Dimension (L×w×H)	蒸盤數量 No. of Plate	蒸盤尺寸 Size of Plate	電 壓 Voltage
KS-30 雙門式 Twin-Door Type	1935 × 957 × 1910 mm	24 pcs	605 × 605 mm	220V, 3200W
KS-30E 單門式 Single-Door Type	1025 × 957 × 1910 mm	12 pcs	605 × 605 mm	220V, 3200W
KS-50 雙門式 Twin-Door Type	1825 × 815 × 1967 mm	24 pcs	605 × 605 mm	220V, 3200W
KS-50E 單門式 Single-Door Type	1015 × 815 × 1967 mm	12 pcs	605 × 605 mm	220V, 3200W

展示保溫箱

Warmer & Showcase

(E (A)

四面玻璃加上照明設計,食品展示效果好,抽屜式設計食物方便拿取販售! Four Side Glass with Lamps Light Up, Nice for Display. Drawer Type Design, Easy to Take Out Food!

KS-100

- ◉ 落地式展示保温箱。
- Floor Type Electrical



KS-618

- 桌上型展示保溫箱。
- Table-top Type Electrical Display Warmer.
- * 電熱型 Electrothermal Type



KS-650

- 展示保温箱。
- Display Warmer.
- * 瓦斯型 Gas Type







KS-630(1)

- 展示保温箱。
- Display Warmer.
- * 電熱型 Electrothermal Type







KS-630(2)

- ◉ 展示櫥。
- Display Warmer.
- * 瓦斯型 Gas Type







規格 \ Specification

型 號 Model	機械尺寸 (寬×深×高) Machine Dimension (L×w×H)	蒸盤數量 No. of Plate	蒸盤尺寸 Size of Plate	電 壓 Voltage
KS-100	650 × 578 × 1285 mm	5 pcs	465 × 465 mm	220V, 5350W
KS-618	550 × 460 × 1040 mm	4 pcs	332 × 390 mm	110V, 1400W / 220V, 3200W
KS-630(1)	1650 × 842 × 1380 mm	12 pcs	605 × 605 mm	3Ø, 220V/380V/415V, 9~12 KW

規 格 \ Specification

型 號 Model	機械尺寸 (寬×深×高) Machine Dimension (L×W×H)	蒸盤數量 No. of Plate	蒸盤尺寸 Size of Plate	電 壓 Voltage
KS-650	2250 × 842 × 1380 mm	18 pcs	605 × 605 mm	110V/220V (日光燈電壓 / Voltage of Fluorescent Light)
KS-630(2)	1650 × 842 × 1380 mm	12 pcs	605 × 605 mm	110V/220V (日光燈電壓 / Voltage of Fluorescent Light)